

Ref. : CS 2140.pas

Rev. : Initial

Date : 31/01/2012

Page : 1/1

THREADED TYPE LIFT CHECK VALVE

CS 2140



Tecofi'
FAREX FLUID SOLUTION DESIGNER

APPLICATION


General uses : Water and saturated steam.

GENERAL CHARACTERISTICS

Range : from DN 1/4" up to DN 2"

CONSTRUCTION

4	1	Stem	Bronze
3	1	Tightness	Stainless steel
2	1	Bonnet	Bronze
1	1	Body	Bronze
Pos.	Qty.	Description	Material

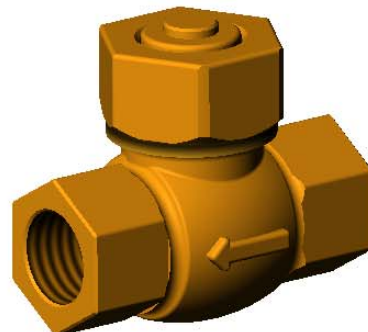

DIMENSIONS

DN inch	L	H	Weight (kg)
1/4"	55	30	0,4
3/8"	60	35	0,45
1/2"	67	40	0,5
3/4"	80	45	0,9
1"	95	50	1,45
1"1/4	110	60	2,2
1"1/2	120	75	2,7
2"	150	85	4,2

WORKING CONDITIONS

Maximum working pressure : 20 bar.

Maximum temperature : +225°C.

AGREEMENT AND TESTING

Test procedures are established according to NF EN 12266-1, DIN3230, ISO 5208.
BSP threaded according to ISO 228.

