

Ref. : VPE 4408-B04

Rev. : Initial

Date : 23/02/2017

Page : 1/1

WAFER TYPE BUTTERFLY VALVE TECLARGE WITH ELECTRIC ACTUATOR BERNARD

VPE 4408-B04



APPLICATION

General use : water, air, etc.
"Non suitable for steam application"

GENERAL CHARACTERISTICS

Design in accordance with NF EN 593.
Tightness in both ways.
Sleeve internally reinforced in aluminium giving a low torque.
Two kinds of construction:
- wafer type with smooth ears from DN350 to DN600;
- with middle flange having smooth holes from DN700 to DN1200.
Self lubricating bearing in copper alloy.

CONSTRUCTION

11	1	Handwheel	
10	1	Electric actuator	BERNARD
9	1	Cover	Ductile iron
8		Bushing	Copper alloy
7	1	O ring	NBR
6		Bushing	Copper alloy
5	1	Sleeve	Heat EPDM
4		Pin	Stainless steel 410
3	1	Disc	Ductile iron EN-GJS400-15
2		Stem	Stainless steel 410
1	1	Body	Ductile iron EN-GJS400-15
Pos.	Q-ty	Description	Material

DIMENSIONS

DN mm inch	A	B	C	ØD	Output flange		ØD1	n-Ø	4-M	g°	Actuator reference	Weight (kg)
					ISO 5211	ISO 5210						
350 14"	368	267	76,5	333,5	F14	F10	460	16-23	-	22,5	ASM6	88
400 16"	400	309	102	389,6	F14	F10	515	16-28	-	22,5	ASM6	117
450 18"	422	340	114	440,5	F14	F10	565	20-28	-	18	ASM6	137
500 20"	442	365	127	491,6	F14	F10	620	20-28	-	18	ASM6	144
600 24"	562	459	151	592,5	F16	F10	725	20-31	-	18	ASM6	244
700 28"	624	520	163	695	F25	F10	840	20-31	4-M27	15	ASM6	401
800 32"	672	591	188	794,7	F25	F10	950	20-34	4-M30	15	ASM10	506
900 36"	720	656	203	864,7	F25	F10	1050	24-34	4-M30	12,85	ASM10	669
1000 40"	800	722	216	965	F25	F14	1160	24-37	4-M33	12,85	ASM16	862
1200 48"	941	864	276	1160,6	F30	F14	1380	28-41	4-M36	11,25	ASM16	1251

WORKING CONDITIONS

General use : air compressor

Maximum working pressure : 5 bar.

Maximum working temperature : + 60 °C

General use : water

Maximum working pressure : 10 bar.

Maximum working temperature : -15 °C / +130 °C.

STANDARDS



Manufacture according to the requirements of the European directive 2014/68/UE «Equipments under pressure» : modulate H.
Pressure test according to standards EN 12266-1, DIN 3230, BS 5154 and ISO 5208 :

Body : 15 bar.


Seat : 11 bar.

Face to face according to standard EN 558-1 serie 20, ISO 5752 serie 20 and DIN 3202.

Wafer type ISO PN10 connections according to standard EN 1092-2.

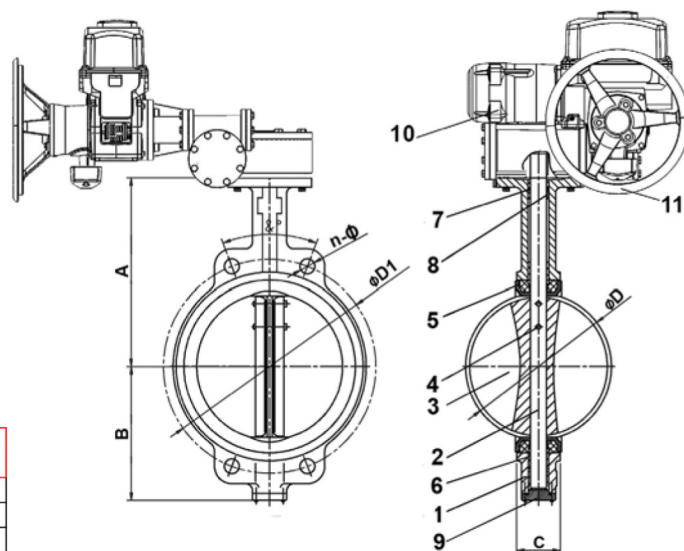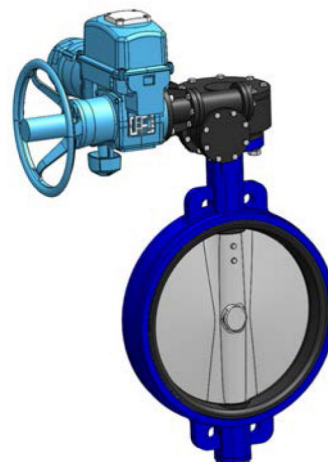

DN350 - DN600

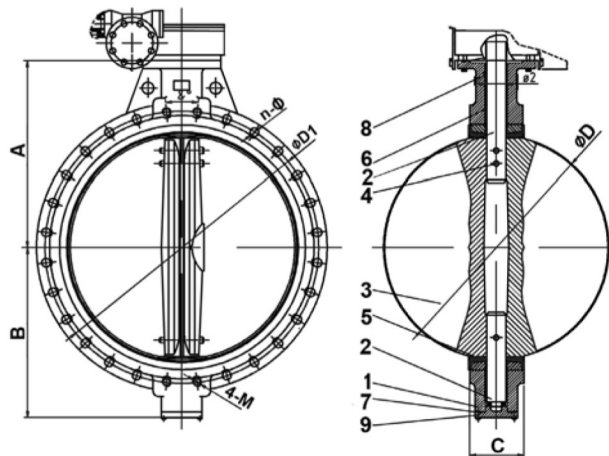

DN700 - DN1200

TECOFI France - 83, Rue Marcel Mérieux 69960 Corbas - FRANCE
Tél. +33 (0) 4 72 79 05 79 - Fax +33 (0) 4 78 90 19 19 / +33 (0) 4 72 79 05 70
Adresses e-mail : sales@tecofi.fr ; tecofi@tecofi.fr / Site web : www.tecofi.fr